EDM-30E Control Box

No:	Description
1. EMCION	Connection of EMICON Harness to Control by Plug in
2. Motor	Connection of Motor to Control by Plug in
3. Buzzer	Audible indication of error status or other applications
4. Enter Prog.	Hold to enter programme mode
5. LED Display	LED Display is a visual display for the installer to correctly set up and operate EDM-E Operator. LED Display: – LED1 – Function/Application – LED2 – Parameter Value – POWER LED – Power Indicator – INPUT LED – Signal Input Indicator
6. + Reset	'+' Operational settings – value can be increased. Reset Button – Operation factory settings can be restored.
7. Test	'-' Operational settings – value can be decreased. Test Button – Used to check the basic function of the operator when servicing or installation. Activation signal for Test open cycle.
8. Power	Input 200–240V AC 3pin Plug in

EDM-30E Motor Gear Box

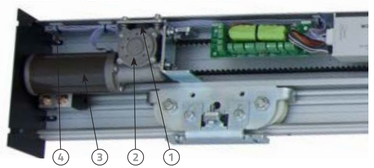

No:	Description
1.	Motor Mount Base with Vibration Proof Rubber
2.	Motor Pulley (Behind)
3.	Brushless DC Motor
4.	Connection Harness to EDM MD Control Box

Delivery

MICOM EDM-30E Series - Supplied in formats as follows:

- **EDM-30E 'COMPLETE OPERATOR'** consisting of: Base Rail, Cover, Control Box, EMICON Board, Motor Gear Box, End Covers, Tooth Belt, Belt Bracket Link Assembly, Belt Connection Single & Double Door, Idle Pulley Assembly, Hanger Roller Brackets x4 and Stopper x3
- **COMPLETE OPERATOR** - Standard Rail Length: Single Leaf - 3000mm, Double leaf - 6000mm
- **EDM-30E 'FULL KIT'** - (Without Rail & Cover) consisting of: Control Box, EMICON Board, Motor Gear Box, Tooth Belt (7M), Belt Bracket Link Assembly, Belt Connection Single & Double Door, Idle Pulley Assembly, Hanger Roller Brackets x4 and stopper x3
- **RAIL & COVER** - (Material Only) - Standard Length: Single Leaf - 3000mm, Double leaf - 6000mm



Dimensions in Millimeters (mm)

Specification

Model	30E-S	30E-D
Application	Single	Double
Door Weight (max)	250kg	150kg x2
Power Consumption	100 - 240V AC / 50 - 60 Hz - 2A	
Power Output	24V DC, 300mA (for accessory only)	
Control System	Microprocessor	
Motor	Encloses Brushless DC Motor	
E-Lock	Electromagnetic Lock – Fail Secure Lk1/FailSafe Lk2 (optional)	
Battery	Allows open or closing in an emergency situation or when power fails	
Open Door Speed	Adjustable 70 - 500mm/s (adjustable)	
Close Door Speed	Adjustable 70 - 400mm/s (adjustable)	
Open Door Timer	0 - 60sec (10 steps adjustable)	
Partial Open	5 - 90% (10 steps adjustable)	
Safety Obstruction	Detects when opening/closing by Safety Return/Safety Stop	
Pressure - Door to Frame	A small force may be adjusted in order to keep the door closed or open. Force from 0 to 8kg (5 step adjustable)	
Operating Temperature & Humidity	Ambient temperate 0°C - 50°C (no consideration or icing). Ambient humidity 30% - 85% (environment must be free of hazardous materials)	

MICOM AUTODOOR
www.micomautodoor.com

UK / European Office
The Grainger Suite / Regent Centre / Gosforth
Newcastle upon Tyne / NE3 3PF / United Kingdom

Telephone. +44 (0)191 233 6323
Facsimile. +44 (0)191 284 0222
Email. info@micomautodoor.com

Head Office - Japan
6th Floor / Marutake-Honmachi Building 6-18
Honmachi 1-Chome Chuo-ku / Osaka 541-0053 / Japan

Telephone. +81 6 6265 1130
Facsimile. +81 6 6265 113
Email. info@micomautodoor.com

100% Japanese Quality and Engineering

MICOM & NHN are registered trademakrs and divisions of Kenwa Company Limited, Osaka, Japan

KENWA
Open to new possibilities

EDM-30E

Automatic sliding door operator
Exceptional quality, economical prices

CE **EN16005 Compliant**

MICOM AUTODOOR
www.micomautodoor.com

Introduction

Introduction

EDM 30E is the perfect choice for heavy commercial automatic sliding pedestrian doors. Its compact size and aesthetic housing design will compliment any installation project.

Utilising our advanced microprocessor control unit with a brushless motor, produces near silent and smooth motion up to 500mm/s. Highly reliable, using only quality electronic parts, EDM 30E adapts effortlessly to varied door widths and weight capacities, up to 250kg single and 150kg double leaf.

Installation is simple and achieved in several steps. Starting with a one-time learning cycle of the door stroke and offering variable function adjustment for single or double door leaves. Operational parameters can be adjusted to suit individual installations, through the easily accessible LED visual display found on EDM 30E Control box face.

Designed specifically to meet the highest demands of the European market, EDM 30E is CE, TUV and EN16005 compliant. Offering a host of benefits and features, EDM 30E is truly cost effective providing you with assured long term service.

Main Features

- Economical & Cost Effective Sliding Door Solution
- Power input 100-240VAC (50/60Hz)
- Door Capacity 150-250kg per leaf
- Door Open Speed 500mm/s max
- Memorized one time door stroke
- Easily accessible sensor and threshold safety Inputs
- 24V DC Power Output for Accessories
- LED Digital Control Display
- Wide Parameter Adjustments
- Door Speed & Braking Adjustment
- Energy Saving (% Open) Function
- Emergency Stop (Open or Close)
- Ratchet or Flip-Flop Function
- Battery Open/Close with Monitor as standard
- Electromagnetic Lock (Fail Safe/Secure) Option
- Safe & Long Term Operation Guaranteed
- Selector Switch supplied as standard
- EN16005 compliant

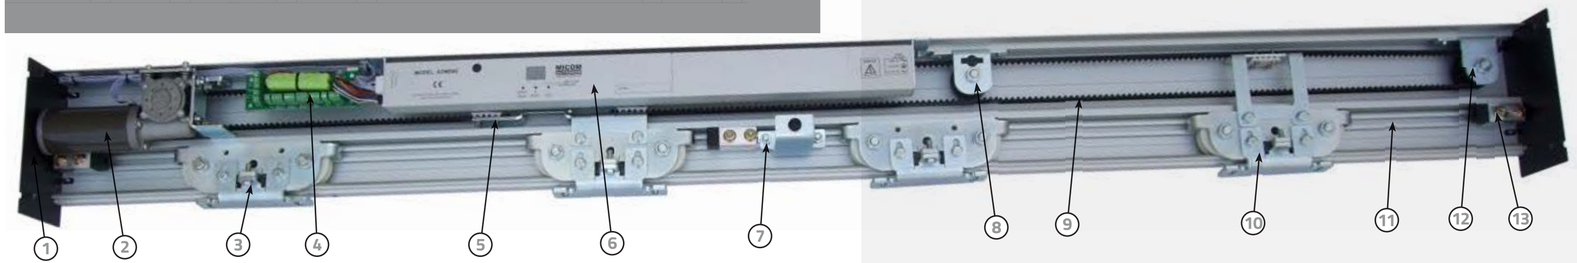

Product Summary

Product Summary

No:	Description
1.	End Cover
2.	Motor Gear Box EDM-30E
3.	Hanger Roller Bracket
4.	EMICON Board with Battery
5.	Belt Tightening Bracket
6.	Control Box EDM-30E
7.	Cover Support Stopper
8.	Centre Pulley
9.	Belt
10.	Hanger Roller Bracket (Double)
11.	Base Rail
12.	Idle Pulley
13.	End Stopper

CE **EN16005 Compliant**

EDM-E Series

EDM-E Series

EDM 18E

EDM 30E

EDM 18E 2S/D

EDM18E RD

MICON Communicator

EMICON Communicator - Quick and Easy Connections to Accessories and Ancillaries

Our **EMICON** interface board offers a quick means of installation. Communication of all accessory and safety signals are combined with battery input and lock control. Working in parallel, these signals are controlled via our Selector Switch for greater ease of operation by the end user.

MICOM Rotary Key Selector Switch is supplied as standard together with EDM-E Series operator allowing selection of 4 separate door modes. In a fire retardant black plastic mount box with cover design in white, MICOM function selectors can be fitted to walls or aluminium frames alike.

Functions:

- Lock – Night/Closed
- Exit Only
- Automatic
- Hold Open

The **EMICON** communicator inter-connects the Control Unit with the different peripheral components as follows:

No:	Description
1.	24V Output 0.3A max
2.	Monitoring Input
3.	Emergency Stop Input
4.	Emergency Open/Close Input
5.	Night Switch
6.	E-Lock Output
7.	Internal Sensor with 24V Output

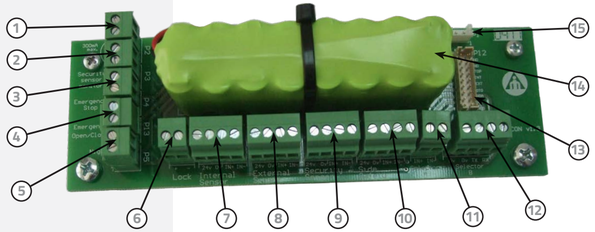

No:	Description
8.	External Sensor with 24V Output
9.	Safety Beam Sensor with 24V Output
10.	Side Screen Sensor with 24V Output
11.	Selector A
12.	Selector B
13.	Control Unit Connector
14.	Battery
15.	Battery Connector

EDM-E Series complies with all new EU regulations (EN16005) for enhanced automatic door safety. Designed for use with a new range of sensors such as BEA IXIO-S & Optex OA-Axis-T.

IXIO-S is an active infrared presence sensor. The tridimensional area of its infrared curtain protects the users from any contact with the doors. Adjustment is made easier with an LCD screen offering 10 different widths of curtains, to cover the full travel area of the door.

OA-AXIS-T Series based on active infrared technonlogy. Developed as a combination sensor for threshold safety and activation, the OA-Axis T is in compliance with the latest European and local regulations as EN 16005 and DIN 18650, tested and approved by the German test organisation TÜV. Due to its variety in output options the OA-Axis series meets the requirements in various markets throughout Europe.

EDM-30E when used without monitoring can also accept all current sensors available in the world market today, such as BEA Eagle & Optex OA-203C together with threshhold safety beam protection.

EAGLE Series is a microwave sensor which detects movement. Utilising a planar antenna together with multi directional detection modes, the EAGLE offers high levels of stability and reliability. It is the solution for all types of automatic doors, irrespective of the surroundings utilizing K-band microwave technology.

OS-12C Safety Beam is an active infrared safety beam system. Its amplifier and sensor heads are designed for fast, simple installation while maintaining the highest standards of safety and reliability. Recognized by door professionals worldwide for is reliability and resistance to sunlight and other interference.

Accessories

Accessories

MICOM Digital Selector Switch offers further options of door control. A digital touchpad, allows selection of 6 separate door modes. Economic in design, MICOM Digital Selectors are easy to install and operate. Supplied in a fire retardant black plastic mount box, with attractive cover design in white, our function selectors can be fitted to walls or aluminium frames alike.

Functions:

- Lock – Night/Closed
- Exit Only
- Entry Only
- Automatic
- Hold Open
- Half Open

Door Profile Solutions - Various Fixed and Moving profile designs available without glass.

Frameless Glass Brackets - Fitting Brackets for 10mm and 12mm Glass thickness available without glass.



- **Floor Guides** - Various floor guides for framed and frameless glass doors available.